

CONTROL TECHNIQUES



DFS SERIES

READY TO USE AC CUBICLE DRIVES
FOR INDUSTRIAL AUTOMATION, PUMPING AND HVAC/R

DRIVE OBSESSED

READY TO USE HIGH POWER CUBICLE DRIVES

DFS SERIES PRE-ASSEMBLED CUBICLE DRIVES

Efficient System Build.

Designing and building a high power drive cubicle takes immense engineering knowhow. Most people don't have that expertise in-house. But we do. And we've put it all into our DFS freestanding drives.

The cubicle system is designed to handle high power applications – maximum energy efficiency and ingress protection when you need it most. The drives are pre-assembled, they're easy to set up. Just install the cubicle and flick the switch. Maximum plant availability, minimum technical wizardry required.



DFS SERIES

KEY

HIGHLIGHTS

Ready to use: Easy set-up

- Industry standard cubicles which integrate with your existing installation (for sizes see page 16)
- Includes power disconnect and fuses
- Pre-installed options available include:
 - i. EMC filter
 - ii. Energy monitoring
 - iii. 24V back-up supply wiring
 - iv. Empty sections can be integrated for customer equipment and installation cables
- See page 11 for full list of options
- Water cooling is available on request

Straightforward set-up & commissioning

- Commissioning is made easy with a door mounted multi-language HMI
- Enhanced diagnostics thanks to the real time clock
- Connect PC tool for optimum commissioning:
 - i. Loaded with parameter management features, including cloning
 - ii. Easy-to-read dynamic logic diagrams so you can visualise and manage the drive in real time

Fast delivery

Need your order ASAP?

Our local Drive Centres and partners have got the quote and order process down to a fine art. Issues that could cause delays are ironed out immediately.

- Emergency breakdowns won't set you back weeks; we'll ship you a replacement drive within a week
- Standard lead-times are six weeks



CONTROL
TECHNIQUES

DFS



ENERGY EFFICIENT

HIGH POWER APPLICATIONS



Fans & pumps

- Fan & pump macros, plus onboard logic functions
- Water hammer control, and catch a spinning motor
- On-board Fire Mode
- Improved energy efficiency during low demand



Compressors

- On board PLC and PID functionalities for advanced control without the cost and footprint of an external controller
- Energy efficiency and optimal control for increased Coefficient of Performance (CoP)



General Automation

- Maximum control for conveyors with S-ramp acceleration / deceleration profiling and RFC-A automated load control
- Efficient control of mixer applications and up to 200% overload
- Closed-loop control for cranes and hoists for precision accuracy
- Reliability and control for crushers
- Precision and repeatability for extruder applications
- High energy efficiency and torque control for tunneling and drilling applications and up to 200% overload

CAN-DO CORVES

DFS SERIES

MAINTAIN PLANT UPTIME

With high reliability, easy maintenance and fast service support.

Rugged, reliable drive systems

- Highly robust cabinets with ingress protection options to meet the needs of the application
 - i. IP23 as standard
 - ii. IP54 as selectable option
 - iii. IP55 water-cooled on request
- Cabinet temperature control via intelligent fan system
- Built with stringent quality controls with full traceability and rigorous testing gives our plant ISO-9001 accreditation
- High quality auxiliary components sourced from leading automation industry vendors



Diagnostic Tool

Fix error codes quickly and get help with set-up and fault-finding in the Diagnostic Tool app: controltechniques.com/mobile-applications



Download support

Comprehensive collection of manuals available for download from controltechniques.com or using the QR code.

Optimum local service support to minimise downtime

- Control Techniques is active in 70 countries and offers global support from local Drive Centers or Partners
- Rapid on-site support, in your language, from highly qualified, experienced service and application engineers
- Efficient service with replacement parts available locally
- Comprehensive online support including: Drive set-up, diagnostic tool and online support



Drive set-up

Everything you need for quick and easy installation in our free-to-access online guides: www.drive-setup.com



Free 2 year warranty

All of our components come with a 2-year warranty so you can rest easy
Warranty terms and conditions apply.

 Every drive cubicle is fully compliant, and CE marked to guarantee standards



MAXIMUM VERSATILITY

VARIANTS FOR EVERY APPLICATION

DFS is available with a control stage to suit any application:

- Industrial automation systems based upon induction or servo motors, where control dynamics are key.
- HVAC/R systems where dedicated drive features provide overall system control.
- DFS supports the latest high-efficiency motors to maximise return on investment and minimise impact on the environment.

Select from: Unidrive M700, M701, M702, Pump Drive F600 or HVAC Drive H300


	M700	Multi-protocol	<ul style="list-style-type: none"> • 2 x Switched Ethernet ports with multi-protocol (EtherNet/IP, Modbus/TCP, RTMoE and PROFINET RT) • 1 x Safe Torque Off (STO) certified to SIL3/PLe • Analogue and digital I/O
	M701	RS485 Modbus RTU	<p>Designed to match Control Techniques' legacy Unidrive SP feature-set.</p> <ul style="list-style-type: none"> • Modbus RTU over RS485 communications • 1 x STO certified to SIL3/PLe • Analogue and digital I/O
	M702	Safety enhanced	<ul style="list-style-type: none"> • 2 x Switched Ethernet ports with multi-protocol • 2 x STO certified to SIL3/ PLe • Digital I/O
	F600	Pump	<ul style="list-style-type: none"> • Highest energy efficiency for pump applications. • Provides sensorless control over both induction and permanent magnet motors • 2 x Relay output
	H300	HVAC	<ul style="list-style-type: none"> • Dedicated, specialist HVAC drive optimised for fan and compressor applications • Modbus RTU and BACnet MS/TP communications provide seamless integration with Building Automation Systems


Please refer to the individual product brochures for full information

Output frequency

DFS drives have a maximum output frequency of 599Hz and are, therefore, not subject to special export controls.

DFS1

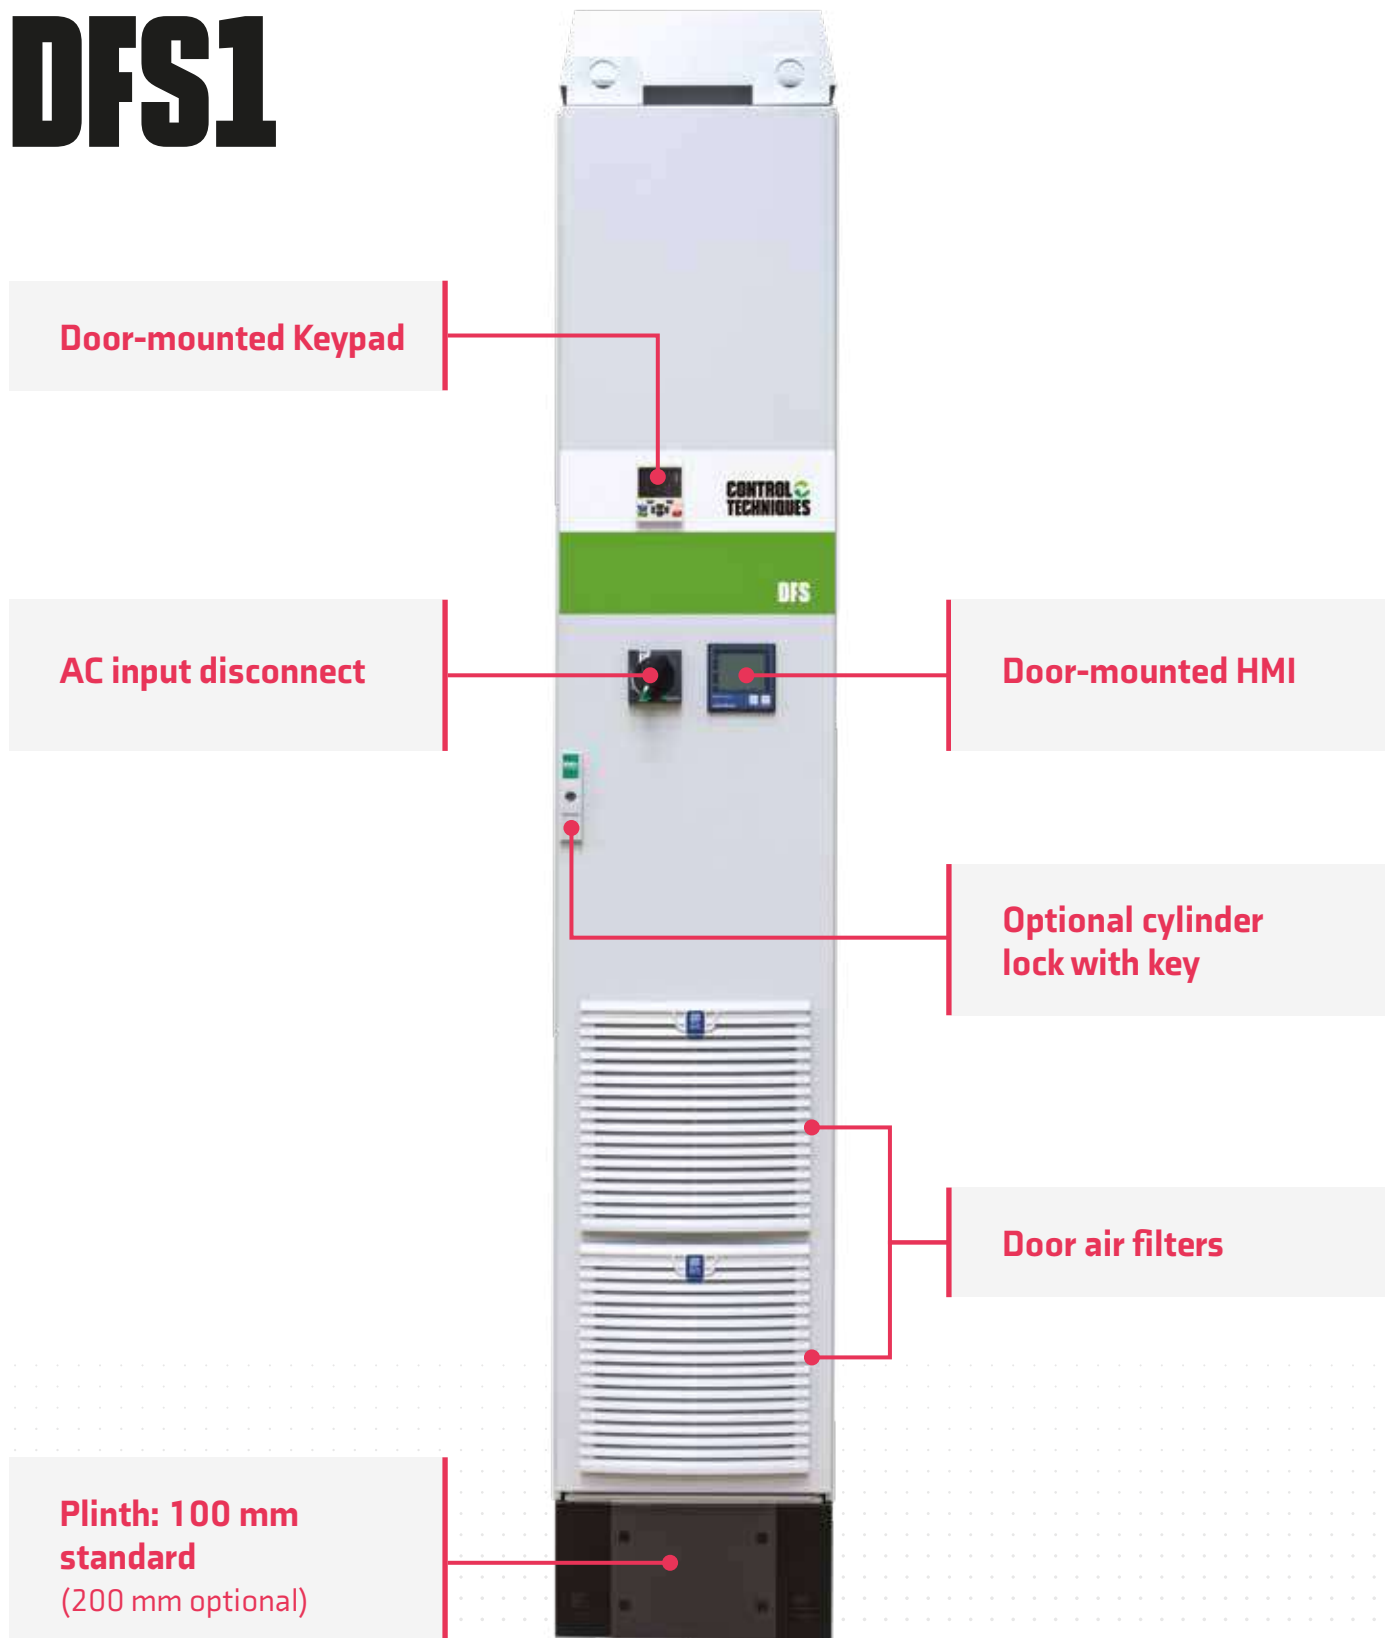

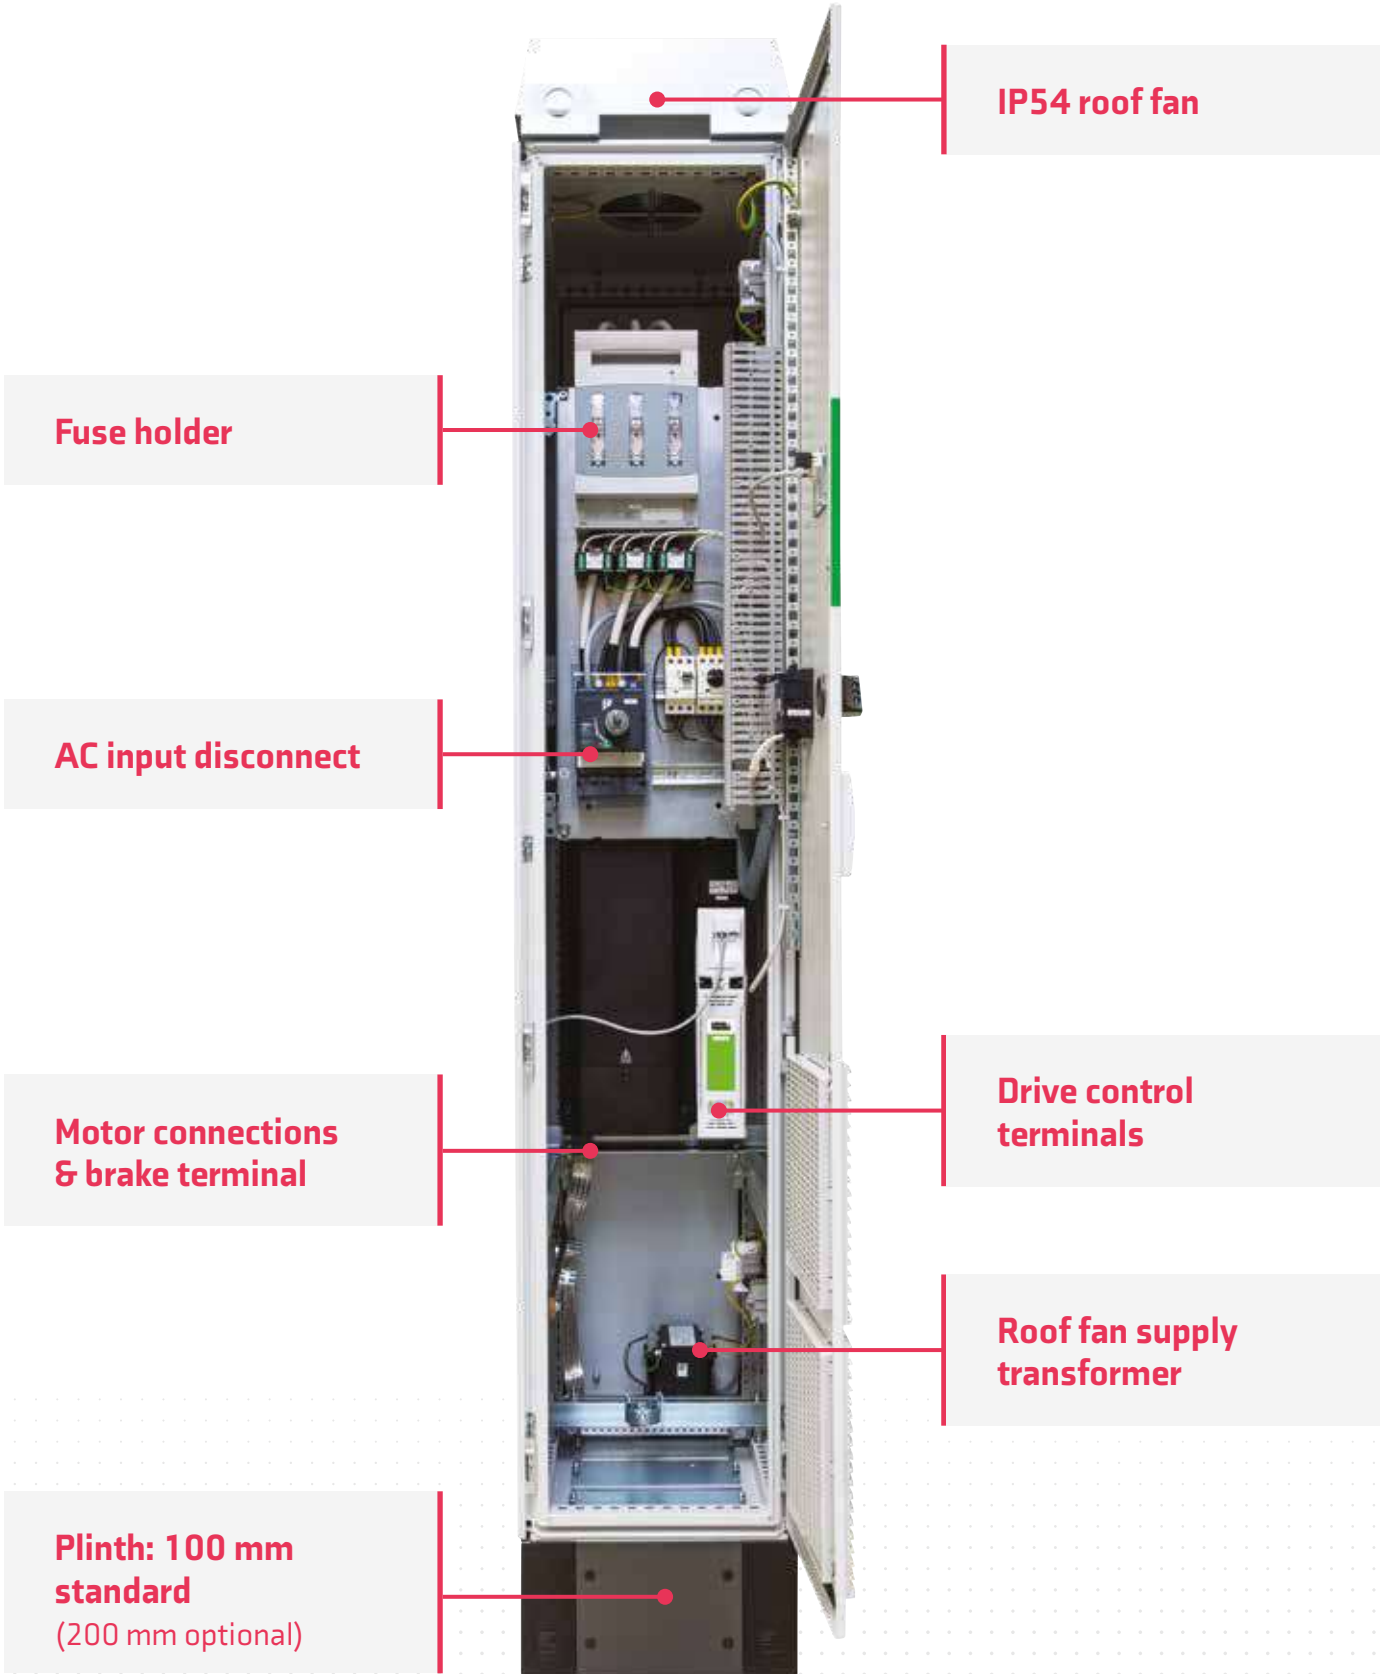

IP54 roof fan

Fuse holder

AC input disconnect


**Motor connections
& brake terminal**

**Plinth: 100 mm
standard
(200 mm optional)**

**Drive control
terminals**

**Roof fan supply
transformer**

DFS2

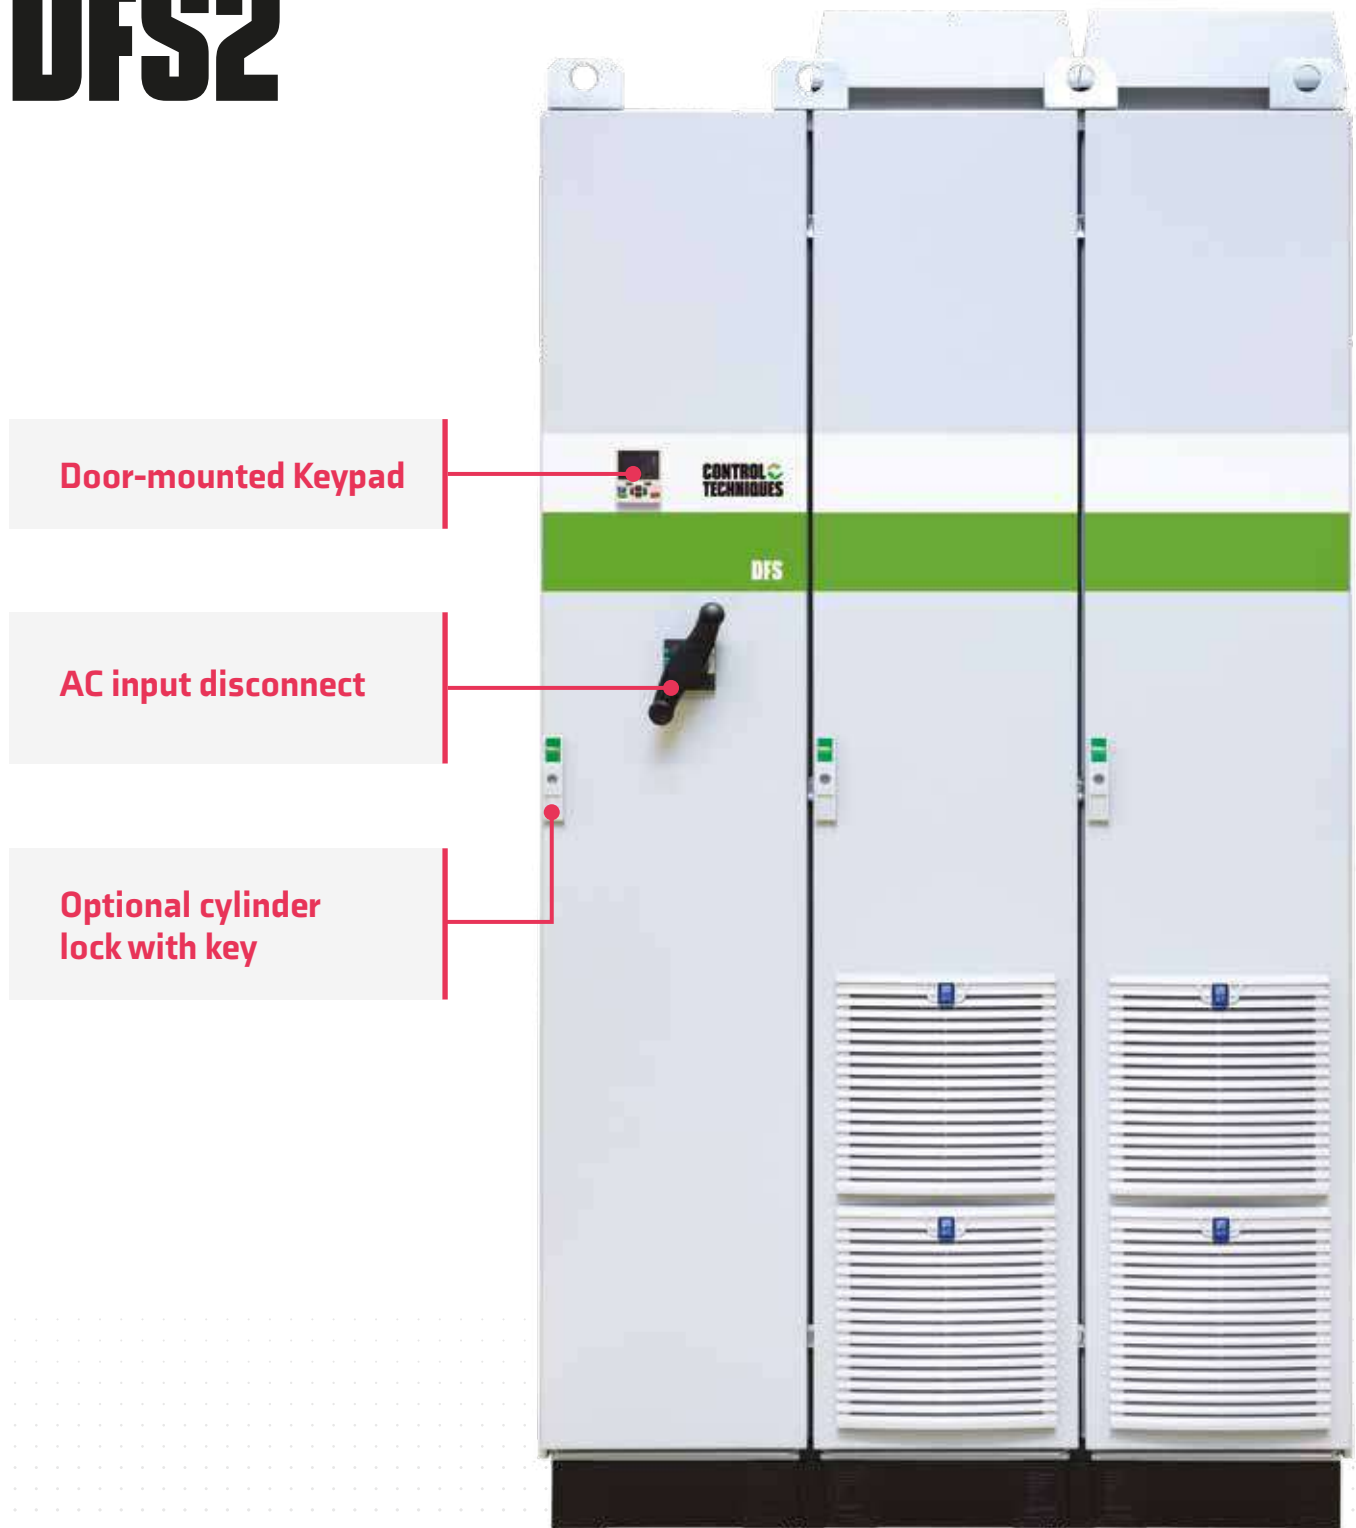

Door-mounted Keypad

AC input disconnect

Optional cylinder lock with key


IP54 roof fan

Fuse holder

AC input disconnect

Output choke

Motor connections

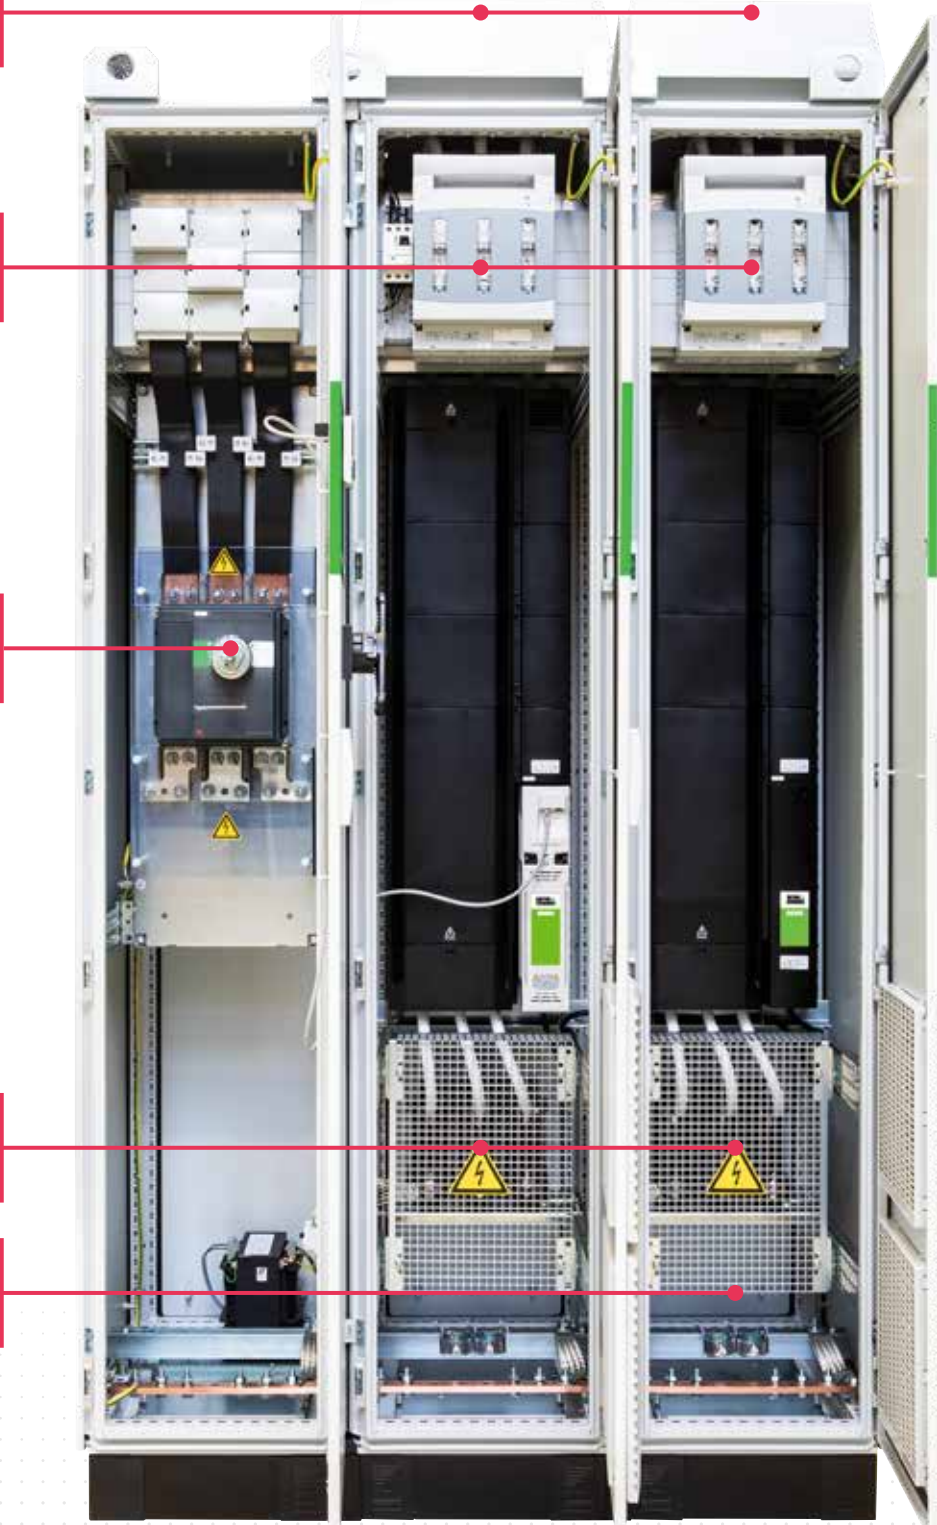



DFS SERIES

DIMENSIONS


Dimensions	
A	180 mm
B	2000 mm
C	100 or 200 mm
D	600 mm
E	DFS1 – 400 mm DFS2 – 1200 mm





DFS SERIES ORDERING GUIDE

Drive Range Format Drive Specification Primary Cubicle Options

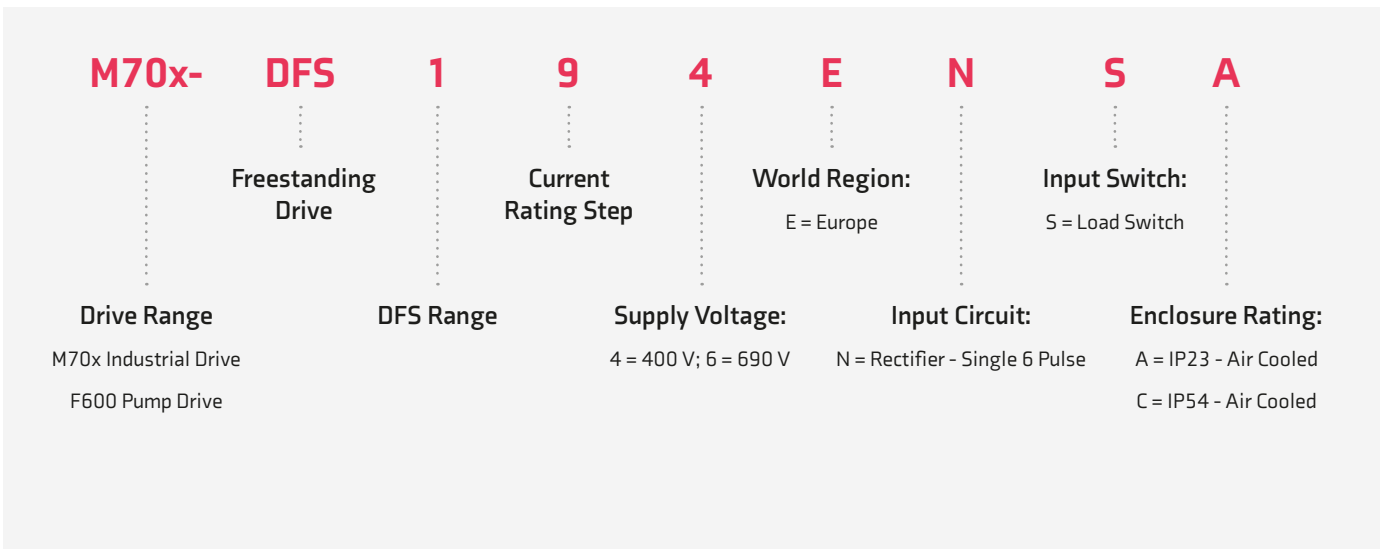

Options:

Feature	Description
Enclosure rating	A = IP23 (Standard) C = IP54 - Air inlet grill filters
Electrical environment	EMC filter to meet generic emission IEC 61000-6-4 or operate in the First Environment
	Remove internal EMC filter for use on un earthed supplies
	Remove MOV protection for use on un earthed supplies
AC Input Disconnect	A - Main switch with undervoltage release coil 230 VAC (MN) B - Main switch with undervoltage release coil 24 VAC (MN) C - Main switch with shunt trip voltage release coil 230 VAC (MX) D - Main switch with shunt trip voltage release coil 24 VAC (MX) 2 x auxiliary contacts on main switch - supply and wiring
Emergency stop push button door mounted	For integration in your control system
Cubicle Options	Cabinet temperature-controlled roof fan Plinth 200 mm. Standard plinth is 100 mm Alternative 180 ° door hinges for improved access Cylinder lock with key for extra cubicle security
F600 HMI	Dedicated interface to configure and monitor your Pump Drive F600 Supports F600 in Single Pump, Cascade and Multi-leader modes Intuitive graphical interface gives real-time access to PID monitoring and historic trends Pre-configured pages can be tailored for application customisation Connect via Modbus RTU or Modbus TCP/IP
Energy Monitoring	A - kWh meter Conventional (IP54) with current transducers (non MID) B - kWh meter Modbus RTU with current transducers (non MID) C - kWh meter Profibus (400 V SUPPLY ONLY) with current transducers (non MID) D - kWh meter Ethernet with current transducers (non MID) kWh meter pulse contacts in combination with A, B, C OR D kWh meters
24 V back-up power	Supply wiring installed for external 24V backup power supply
Additional Cubicles	A - Integrated 400 mm empty cubicle with plinth, cable plates INCLUDING mounting plate - for your system equipment B - Integrated 400 mm empty cubicle with plinth, cable plates and WITHOUT mounting plate - for your installation cable management
Packaging	Packaging for land freight as standard Packaging for air freight available at extra cost

Drive selection for 380/480 VAC: Load switch, fuses and IP23 protection as standard

35°C Ambient IP23 and IP54				
380/480 VAC ±10% 50 Hz				
Order Code (Short)	Normal Duty 110 %		Heavy Duty Open Loop = 150 % RFC = 175 %	
	xxxx = F600, M700, M701, M702		xxxx = M700, M701, M702	
	Max Cont. Current	Motor Shaft Power	Max Cont. Current	Motor Shaft Power
	(A)	(kW)	(A)	(kW)
xxxx-DFS1G4EN	155	75	134	55
xxxx-DFS1H4EN	184	90	157	75
xxxx-DFS1J4EN	221	110	180	90
			200 (2 kHz)	
xxxx-DFS1K4EN	255	132	211	110
	266 (2 kHz)	132 (2 kHz)	224 (2 kHz)	110 (2 kHz)
xxxx-DFS1L4EN	320	160	270	132
xxxx-DFS1M4EN	361	200	307	160
			320 (2 kHz)	160 (2 kHz)
xxxx-DFS1N4EN	437	225	377	200
xxxx-DFS1P4EN	460	250	417	225
	487 (2 kHz)	250 (2 kHz)		
xxxx-DFS1Q4EN	460	250	415	225
	507 (2 kHz)	280 (2 kHz)	464 (2 kHz)	250 (2 kHz)
xxxx-DFS2L4EN	608	315	513	270
xxxx-DFS2M4EN	686	370	583	315
			608 (2 kHz)	315 (2 kHz)
xxxx-DFS2N4EN	830	450	716	380
xxxx-DFS2P4EN	874	470	792	420
	925 (2 kHz)	500 (2 kHz)		
xxxx-DFS2Q4EN	874	470	789	420
	963 (2 kHz)	520 (2 kHz)	882 (2 kHz)	470 (2 kHz)

40°C Ambient IP23 and IP54				
380/480 VAC ±10% 50 Hz				
Order Code (Short)	Normal Duty 110 %		Heavy Duty Open Loop = 150 % RFC = 175 %	
	xxxx = F600, M700, M701, M702		xxxx = M700, M701, M702	
	Max Cont. Current	Motor Shaft Power	Max Cont. Current	Motor Shaft Power
	(A)	(kW)	(A)	(kW)
xxxx-DFS1G4EN	155	75	134	55
xxxx-DFS1H4EN	184	90	152	75
xxxx-DFS1J4EN	221	110	180	90
			200 (2 kHz)	
xxxx-DFS1K4EN	221	132	180	110
	221 (2 kHz)	132	200 (2 kHz)	110
xxxx-DFS1L4EN	320	160	270	132
xxxx-DFS1M4EN	341	200	295	160
			314 (2 kHz)	160
xxxx-DFS1N4EN	426	225	377	200
	437 (2 kHz)		377	
xxxx-DFS1P4EN	438	250	398	225
	475 (2 kHz)		416 (2 kHz)	225
xxxx-DFS1Q4EN	438	250	398	225
	485 (2 kHz)		280 (2 kHz)	441 (2 kHz)
xxxx-DFS2L4EN	608	315	513	270
xxxx-DFS2M4EN	648	370	560	315
	669 (2 kHz)		596 (2 kHz)	315
xxxx-DFS2N4EN	809	450	716	380
	830 (2 kHz)		716	
xxxx-DFS2P4EN	831	470	755	420
	902 (2 kHz)		500 (2 kHz)	790 (2 kHz)
xxxx-DFS2Q4EN	831	470	755	420
	921 (2 kHz)		520 (2 kHz)	838 (2 kHz)

Notes:

- 3kHz Switching Frequency except where stated otherwise
- "kW" are motor dependant and for indication only
- A braking transistor is included in all drives
- Remaining digits of order code generated automatically for customer selected cubicle options

***Higher powers can be quoted on request**

Drive selection for 500/690 VAC: Load switch, fuses and IP23 protection as standard

35°C Ambient IP23 and IP54				
500/690 VAC ±10% 50 Hz				
Order Code (Short)	Normal Duty 110 %		Heavy Duty Open Loop = 150 % RFC = 175 %	
	xxxx = F600, M700, M701, M702		xxxx = M700, M701, M702	
	Max Cont. Current	Motor Shaft Power	Max Cont. Current	Motor Shaft Power
	(A)	(kW)	(A)	(kW)
xxxx-DFS166EN	86	75	63	55
xxxx-DFS176EN	108	90	86	75
xxxx-DFS186EN	125	110	104	90
xxxx-DFS196EN	155	132	131	110
xxxx-DFS1A6EN	172	160	150	132
xxxx-DFS1B6EN	197	185	178	160
xxxx-DFS1C6EN	225	200	210	185
xxxx-DFS1D6EN	265	235	221	185
	275 (2 kHz)	250 (2 kHz)	238 (2 kHz)	200 (2 kHz)
xxxx-DFS1E6EN	265	235	221	185
	305 (2 kHz)	280 (2 kHz)	263 (2 kHz)	250 (2 kHz)
xxxx-DFS2A6EN	327	300	285	260
xxxx-DFS2B6EN	374	355	338	315
xxxx-DFS2C6EN	428	400	399	370
xxxx-DFS2D6EN	504	440	420	370
	523 (2 kHz)	490 (2 kHz)	452 (2 kHz)	420 (2 kHz)
xxxx-DFS2E6EN	504	440	420	370
	580 (2 kHz)	540 (2 kHz)	500 (2 kHz)	460 (2 kHz)

40°C Ambient IP23 and IP54				
500/690 VAC ±10% 50 Hz				
Order Code (Short)	Normal Duty 110 %		Heavy Duty Open Loop = 150 % RFC = 175 %	
	xxxx = F600, M700, M701, M702		xxxx = M700, M701, M702	
	Max Cont. Current	Motor Shaft Power	Max Cont. Current	Motor Shaft Power
	(A)	(kW)	(A)	(kW)
xxxx-DFS166EN	86	75	63	55
xxxx-DFS176EN	103	90	86	75
	106 (2 kHz)			
xxxx-DFS186EN	125	110	104	90
xxxx-DFS196EN	155	132	131	110
xxxx-DFS1A6EN	172	160	150	132
xxxx-DFS1B6EN	197	185	178	160
xxxx-DFS1C6EN	215	200	205	185
			210 (2 kHz)	
xxxx-DFS1D6EN	253	235	211	185
	263 (2 kHz)	250 (2 kHz)	238 (2 kHz)	200 (2 kHz)
xxxx-DFS1E6EN	253	235	211	185
	301 (2 kHz)	280 (2 kHz)	254 (2 kHz)	250 (2 kHz)
xxxx-DFS2A6EN	327	300	285	260
xxxx-DFS2B6EN	374	355	338	315
xxxx-DFS2C6EN	409	400	390	370
			399 (2 kHz)	
xxxx-DFS2D6EN	481	440	400	370
	499 (2 kHz)	490 (2 kHz)	452 (2 kHz)	420 (2 kHz)
xxxx-DFS2E6EN	481	440	400	370
	571 (2 kHz)	540 (2 kHz)	483 (2 kHz)	460 (2 kHz)

Notes:

- 3kHz Switching Frequency except where stated otherwise
- "kW" are motor dependant and for indication only
- A braking transistor is included in all drives
- Remaining digits of order code generated automatically for customer selected cubicle options

***Higher powers can be quoted on request**



DRIVE OBSESSED



Control Techniques has been designing and manufacturing the best variable speed drives in the world since 1973.

Our customers reward our commitment to building drives that outperform the market. They trust us to deliver on time every time with our trademark outstanding service.

More than 45 years later, we're still in pursuit of the best motor control, reliability and energy efficiency you can build into a drive. That's what we promise to deliver, today and always.

1.5K+

Employees

70

Countries

#1 FOR ADVANCED MOTOR AND DRIVE TECHNOLOGY



Nidec Corporation is a global manufacturer of electric motors and drives.

Nidec was set up in 1973. The company made small precision AC motors and had four employees. Today, it's a global corporation that develops, builds and installs cutting-edge drives, motors and control systems in over 70 countries with a workforce of more than 110,000.

You'll find its innovations in thousands of industrial plants, IoT products, home appliances, cars, robotics, mobile phones, haptic devices, medical apparatus and IT equipment all over the world.

112K

Employees

\$14.2B

Group Turnover

44+

Countries

337+

Companies



CONTROL TECHNIQUES.
NO ONE KNOWS DRIVES LIKE WE DO.

Our drive obsessive representatives will drive you in the right direction and give you first class support whenever you need it.

For more information, or to find your local drive centre, visit:

www.controltechniques.com
www.driveobsessed.com

Connect with us



©2022 Nidec Control Techniques Limited. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Nidec Control Techniques Ltd have an ongoing process of development and reserve the right to change the specification of their products without notice.

Nidec Control Techniques Limited. Registered Office: The Gro, Newtown, Powys SY16 3BE.

Registered in England and Wales. Company Reg. No. 01236886.

P.N.0781-0035-03 01/22

